


Innovation in the air:

The Pro dispenser can be programmed to work for 30 days, 60 days, or 90 days. With no added solvents or alcohols, Pro cartridges contain 100% pure fragrance oil and are a safe choice for any facility. Since the cartidges are not pressurised containers, they are safe to store and recycle.



Cartridge Fragrance Guide

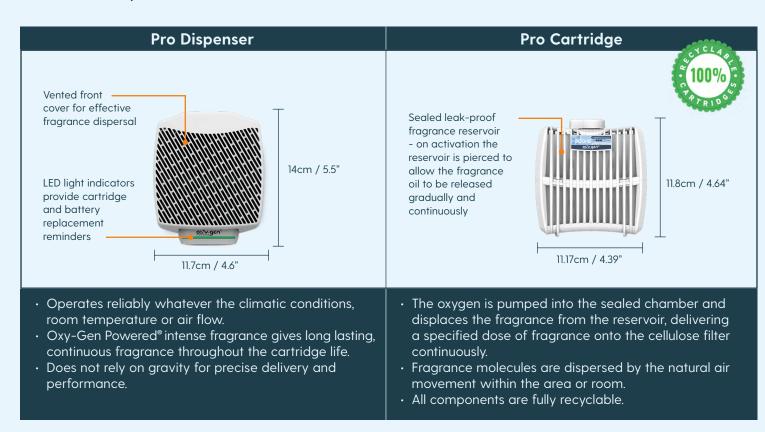





Instructions of use:





Open Dispenser

Lift the front cover of the dispenser.



Insert the batteries

Open the battery compartment and insert 2 high quality AA alkaline batteries.



Select desired duration

Select the required 30/60/90 days setting.



Remove cartridge seal

Tear the protective paper sleeve from the bottom and discard safely.



Activate the cartridge

Activate the cartridge by rotating the cap counter-clockwise to 'ON' position until it clicks.



Insert the cartridge

Push the cartridge firmly into the dispenser unit, using the two ribs at the bottom of the cartridge as a guide, until it locks into place.



Adjust Buzzer Setting

To deactivate the buzzer, push the buzzer switch down (located on the left side of the dispenser).



Green light will flash

Close the dispenser cover. A flashing green light indicates proper installation.

ENSURE cartridge cap is in the 'off' position before removing cartridge mid cycle (if required).

Dispenser Program Settings:

Green light flashing for first 2 minutes after cartridge installation indicates proper installation.

Green light flashing every 15 seconds indicates proper functioning:

- 1 flashing light, indicates a 1 month (30 days) setting.
- 2 flashing light, indicates a 2 month (60 days) setting.
- 3 flashing light, indicates a 3 month (90 days) setting.

Orange light flashing indicates that the cartridge is empty. **Replace immediately.**



If switched on, the buzzer will beep 3 times every 30 seconds to alert cartridge replacement.

Red light flashing every 10 seconds indicates:

- 1 flashing light indicates low battery. Replace.
- 2 flashing lights and the buzzer (if switched on) beeping twice every 30 seconds, indicates the batteries need replacing. Replace Immediately.
- **3 flashing lights** indicates the generator is weak and needs to be replaced in 3-4 months.

Install*:

- At any height on the wall, 1.5m or lower recommended
- At the end of the room
- Above the urinals
- Below the sink



! Doors and windows

! Extraction units

*Please read FAQ page for more information.



Pro	Specification	
Finishes	White	
Performance	Coverage	Up to 6,000 cu. ft. / 170 cu. mtrs. / 64m²
	Position	Can be positioned at any height (1.5m or lower recommended)
	Fragrance	Continuous fragrance guaranteed for desired duration
	Fragrance Program	Programmable fragrance system for 30, 60 or 90 days
	Operation	2 high quality AA alkaline batteries that last up to 18 months (batteries not included)
Dispenser dimensions	W 11.7cm x H 14cm x D 10.3cm	
Weight	258.53g	
Warranty	2 year warranty on dispensers	
Material	Dispenser	Polycarbonate, Polyoxymethylene, Polypropylene
	Cartridge	High Density Polyethylene, Polypropylene, Cellulose based paper and Nitrile Butadiene Rubber
Recyclable	Yes - all the plastic parts in the cartridges and dispensers can be recycled.	
Dispenser Packaging	Dispensers per case	6
	Case Weight	1.82kg
	Case dimensions (W x H x D)	24.8cm x 15.9cm x 31.7cm
	Includes per each dispenser	2 double sided tape
Cartridge Packaging	Cartridge per case	6
	Case weight	1.03kg
	Case dimensions (W x H x D)	19cm x 13.1cm x 22.8cm













FAQs:

✓ Why is correct placement of Oxy-Gen dispensers important?

Proper placement ensures the fragrance fills the room efficiently and uniformly. Incorrect placement can lead to uneven fragrance distribution, reducing the dispenser's effectiveness.

Please refer to our recommended placement guidelines below.

✓ Where should I place Oxy-Gen dispensers for optimal performance?

- 1. Install it as far away from extraction units as possible.
- 2. Install it away from open doors and windows
- 3. The dispenser can be installed at any height provided they are not placed near exhausts/extraction units. **Installing at a height of 1.5m or lower is better.**
- 4. Place the dispensers in such a way that the fragrance takes the longest path to exit the room.

✓ Why should Oxy-Gen dispensers be installed 1.5m or lower?

Oxy-Gen dispensers work differently than aerosols. Installing them lower allows the fragrance to disperse more effectively. As the fragrance is released gradually, it rises and spreads evenly throughout the room. However, avoid placing the unit near extraction or ventilation systems, as they can pull the fragrance out of the room.

Think of it like smoke: it rises and fills the air over time. Oxy-Gen fragrances follow a similar pattern, ensuring a consistent scent throughout the space.

∨ Why are aerosol dispensers typically installed high up?

Aerosol dispensers are mounted higher for two key reasons:

- To prevent accidental sprays from hitting people's eyes.
- · If installed too low, the spray could settle on the floor, making it slippery.

These risk factors don't apply to Oxy-Gen dispensers, as the fragrance is distributed in a controlled manner and safely using our fuel cell technology. This ensures the scent is released evenly without any of the hazards associated with aerosols.

