



Anti-vandal Design

Equipped with a secure anti-vandal locking system, the Scentinel prioritises both style and security, making it a reliable, long-lasting and elegant solution for fragrance dispersion in any environment. The Scentinel Dispenser combines durability and elegance, delivering continuous, precise, and consistent fragrance doses. Its sleek stainless steel finish enhances any setting with a touch of modern sophistication, effortlessly merging robustness with contemporary aesthetics.



Scentinel Dispenser	Scentinel Cartridge
<p>14.9cm</p> <p>Vented sides and front ensuring optimal fragrance dispersal.</p> <p>LED Indicators</p> <p>Key lock</p> <p>12.7mm</p> <p>9.7mm</p>	<p>Sealed leak-proof fragrance reservoir - on activation the reservoir is pierced to allow the fragrance oil to be released gradually and continuously</p> <p>11.8cm / 4.64"</p> <p>11.17cm / 4.39"</p> <p>100% RECYCLABLE CARTRIDGES</p>
<ul style="list-style-type: none"> Operates reliably whatever the climatic conditions, room temperature or air flow. Oxy-Gen Powered® intense fragrance gives long lasting, continuous fragrance throughout the cartridge life. Does not rely on gravity for precise delivery and performance. 	<ul style="list-style-type: none"> The oxygen is pumped into the sealed chamber and displaces the fragrance from the reservoir, delivering a specified dose of fragrance onto the cellulose filter continuously. Fragrance molecules are dispersed by the natural air movement within the area or room. All components are fully recyclable.

Cartridge Fragrance Guide




Covers up to
6,000 cu. ft.
or 170 cu. mtrs.

<p>Neutra-Lox Super</p> <p>✂ ✂ ✂</p>	<p>Adore</p> <p>✂ ✂ ✂</p>	<p>Charm</p> <p>✂ ✂ ✂</p>	<p>Spring</p> <p>✂ ✂ ✂</p>
<p>Crush</p> <p>✂ ✂ ✂ ✂</p>	<p>Glow</p> <p>✂ ✂ ✂ ✂</p>	<p>Elan</p> <p>✂ ✂ ✂ ✂</p>	<p>Elate</p> <p>✂ ✂ ✂ ✂</p>
<p>Spa</p> <p>✂ ✂ ✂ ✂</p>	<p>Tang</p> <p>✂ ✂ ✂ ✂</p>		

Instructions of use:



1		Open the dispenser Unlock the dispenser using the key supplied.
2		Wall mount using the mounting template See Mounting Template on Page 4.
3		Insert the batteries Insert 2 high quality AA alkaline batteries.
4		Set up the dispenser Toggle to choose between Normal Mode (Light Alerts Activated) and Eco Mode (Light Alerts Deactivated) and select the required 30/60/90 days setting.
5		Install the cartridge Remove the protective paper sleeve and discard it. Activate the cartridge by rotating the cap counter-clockwise to 'ON' position until it clicks. Push the cartridge firmly into the dispenser, until it locks into place.



- 1 Normal-Eco mode switch
- 2 Refill Eject button is designed to be visible right in the front, intuitive, easy to locate and push.
- 3 Front access 30-60-90 Days selector Switch

ENSURE cartridge cap is in the 'off' position before removing cartridge mid cycle (if required).

Dispenser Program Settings:

Use the Normal-Eco Mode switch to select desired setting. A dispenser operating in the Eco Mode offers considerable battery savings by disabling the light and buzzer alerts during the cartridge cycle.

Green light flashing for the first 2 minutes after cartridge installation indicates proper installation. After initial 2 minutes, it will flash every 5 minutes. In the Eco mode, there will be no lights after initial installation until a cartridge or battery change is required.

- 1 flashing light, indicates a 1 month (30 days) setting.
- 2 flashing light, indicates a 2 month (60 days) setting.
- 3 flashing light, indicates a 3 month (90 days) setting.

i To check if the dispenser is functioning properly, the Normal-Eco Mode switch can be toggled by moving the switch to Normal Mode and then bring it back to the Eco Mode position.

Orange light flashing indicates that the cartridge is empty. **Replace immediately.**

i In the Normal Mode if the cartridge is not replaced within 7 days, the buzzer will activate and will beep every 30 seconds. There is no buzzer in Eco Mode.

Red light flashing indicates the batteries need to be replaced. **Replace immediately.**


Install*:

- ✓ At any height on the wall, 1.5m or lower recommended
- ✓ At the end of the room
- ✓ Above the urinals
- ✓ Below the sink

Not recommended near:

- ⚠ Doors and windows
- ⚠ Extraction units

*Please read FAQ page for more information.



Scentinel	Specification	
Finishes	Stainless Steel	
Performance	Coverage	Up to 6,000 cu. ft. / 170 cu. mtrs. / 64m²
	Position	Can be positioned at any height (1.5m or lower recommended)
	Fragrance	Continuous fragrance guaranteed for desired duration
	Fragrance Program	Programmable fragrance system for 30, 60 or 90 days
	Operation	2 high quality AA alkaline batteries that last up to 18 months (batteries not included)
Dispenser dimensions	W 12.7cm x H 14.9cm x D 9.7cm	
Weight	605.98g (with key 613.79g)	
Warranty	2 year warranty on dispensers	
Material	Dispenser	Stainless Steel
	Cartridge	High Density Polyethylene, Polypropylene, Cellulose based paper and Nitrile Butadiene Rubber
Recyclable	Yes - all the plastic parts in the cartridges and dispensers can be recycled.	
Dispenser Packaging	Dispensers per case	4
	Case Weight	2.6kg
	Case dimensions (W x H x D)	27cm x 17cm x 21.5cm
	Includes per each dispenser	Instructions, Key and Fixings (Screws & Rawl Plugs)
Cartridge Packaging	Cartridge per case	6
	Case weight	1.03kg
	Case dimensions (W x H x D)	19cm x 13.1cm x 22.8cm

Cartridges are compliant with:



Enviro-Save



FAQs:

✓ Why is correct placement of Oxy-Gen dispensers important?

Proper placement ensures the fragrance fills the room efficiently and uniformly. Incorrect placement can lead to uneven fragrance distribution, reducing the dispenser's effectiveness.

Please refer to our recommended placement guidelines below.

✓ Where should I place Oxy-Gen dispensers for optimal performance?

1. Install it as far away from extraction units as possible.
2. Install it away from open doors and windows
3. The dispenser can be installed at any height provided they are not placed near exhausts/extraction units. **Installing at a height of 1.5m or lower is better.**
4. Place the dispensers in such a way that the fragrance takes the longest path to exit the room.

✓ Why should Oxy-Gen dispensers be installed 1.5m or lower?

Oxy-Gen dispensers work differently than aerosols. Installing them lower allows the fragrance to disperse more effectively. As the fragrance is released gradually, it rises and spreads evenly throughout the room. However, avoid placing the unit near extraction or ventilation systems, as they can pull the fragrance out of the room.


Think of it like smoke: it rises and fills the air over time. Oxy-Gen fragrances follow a similar pattern, ensuring a consistent scent throughout the space.

✓ Why are aerosol dispensers typically installed high up?

Aerosol dispensers are mounted higher for two key reasons:

- To prevent accidental sprays from hitting people's eyes.
- If installed too low, the spray could settle on the floor, making it slippery.

These risk factors don't apply to Oxy-Gen dispensers, as the fragrance is distributed in a controlled manner and safely using our fuel cell technology. This ensures the scent is released evenly without any of the hazards associated with aerosols.

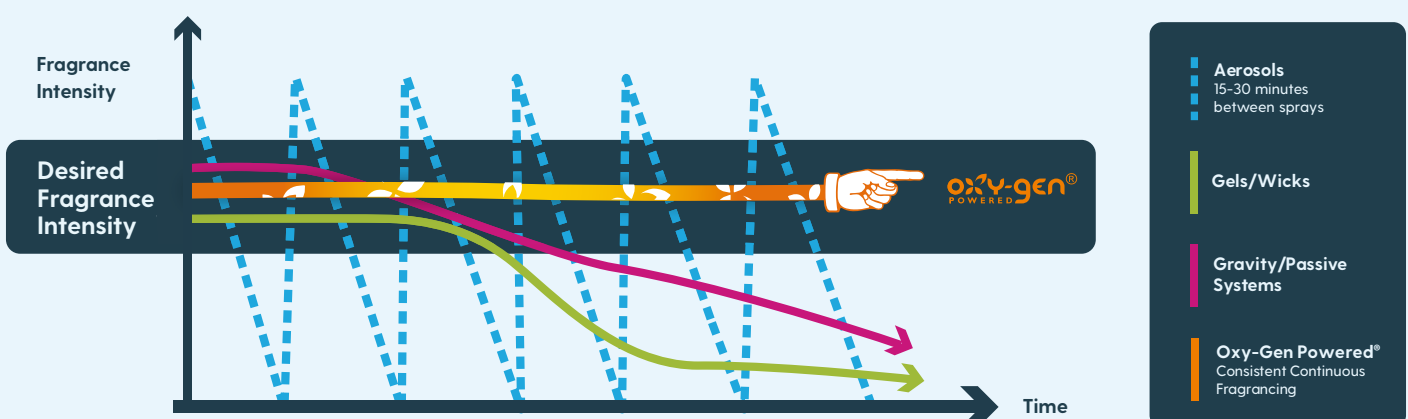



Mounting Template:

